

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <b>H03B 5/12</b>		(11) International Publication Number: <b>WO 96/33552</b>
A1		(43) International Publication Date: 24 October 1996 (24.10.96)
(21) International Application Number: PCT/SE96/00385 (22) International Filing Date: 26 March 1996 (26.03.96) (30) Priority Data: 08/424,077 19 April 1995 (19.04.95) US (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE). (72) Inventor: HAARTSEN, Jacobus; Hambovägen 10, S-245 42 Staffanstorps (SE). (74) Agents: BOHLIN, Björn et al.; Telefonaktiebolaget LM Ericsson (publ), Patent and Trademark Dept., S-126 25 Stockholm (SE).		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  Published With international search report. With amended claims.

(54) Title: MULTI-RESONATOR OSCILLATOR

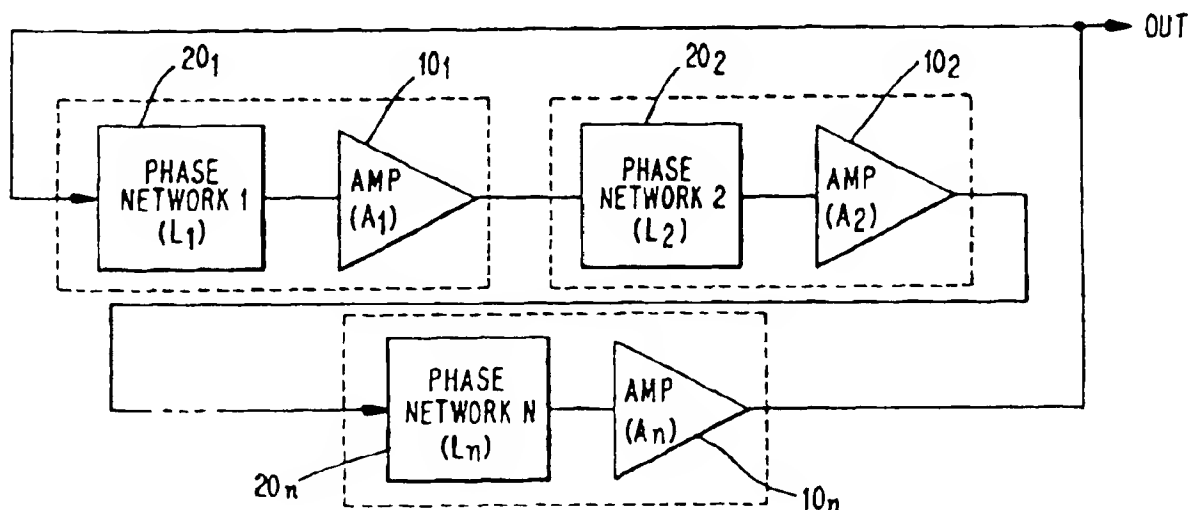

(57) Abstract

An apparatus and method are provided for increasing the Q-value of an oscillator so that a net gain in the stability of the oscillators is obtained. In the apparatus and method, a plurality of units, which each include a passive frequency-selective circuit and an active amplifier, are cascaded and the required isolation between the passive frequency-selective circuits is maintained by the active amplifier acting as a buffer. As a result, interaction and loading is prevented between the passive frequency-selective circuits so that the net gain in the stability of the oscillator is achieved because the Q-value of the oscillator is increased.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

## **MULTI-RESONATOR OSCILLATOR**

### **BACKGROUND**

The present invention is directed to improving the stability of oscillators in applications such as communication systems which up or down convert signals in the transmitters and/or receivers and in frequency synthesizers where pure and stable frequency references are required. Other applications for the device and method of the present invention are in systems that require highly stable clock signals for reference purposes such as watches and computing devices and the device and method are also useful in any area where oscillators are applied.

More particularly, the present invention is directed to concatenating a plurality of resonator/amplifiers in a loop to increase the effective quality and thereby the stability of the oscillator.

Any system in which timing is important in some way has a local oscillator and many systems also require accurate frequency references that are generated locally. For instance, radio would not be possible without a local oscillator in the transmitter and receiver for converting the information signals to the proper frequency bands. The performance of these systems is highly dependent on the stability of the frequency provided by the oscillator. Phase jitter (phase noise) in the output of the oscillator limits the accuracy of the reference and therefore limits the accuracy of the entire system. Amplitude variations in the output of the oscillator are important as well in many applications but these amplitude variations can be readily suppressed with a limiter or an automatic gain control.

The general structure for high performance oscillators include an amplifier which has its output fed back to its input via a resonating structure. The resonating structure produces a large output change when the frequency in the feedback loop varies and this output change opposes the frequency variations so that the frequency variations are minimized. As the change in the resonator output on a frequency variation becomes larger, the correction also becomes

stronger. The resonator change with frequency is indicated by a quality or Q-value. A higher Q-value indicates that the resonator is more sensitive to frequency variations and therefore the ultimate oscillator output frequency will be more stable. In order to provide oscillators having pure and stable frequency outputs, low noise and high Q-values are required for the oscillator. High Q-values in the resonating structures for stable oscillators are essential because the final output spectrum of the oscillator is determined by the noise generated in the loop and the Q-value of the resonator.

Figure 1 illustrates the configuration for a typical oscillator where an amplifier 10 is fed back by a passive, phase rotating network 20. The oscillator 5 starts to oscillate at the frequency for which the Barkhausen conditions are fulfilled where the loop gain is exactly 1 and the loop phase is 0 or a multiple of  $2\pi$ . The oscillator 5 is preferably designed such that the phase condition occurs in the steepest part in the phase characteristics of the resonator. More precisely, the Q-value of the network 20 is related to the phase derivative, or group delay  $\delta\varphi/\delta f$  of the resonator according to:

$$Q = \left| \frac{1}{2} f_0 \frac{\delta\varphi}{\delta f} \right| \quad \text{EQUATION 1}$$

where  $f_0$  is the resonating frequency in Hz.

The output spectrum of the oscillator 5 can be determined by modeling the oscillator 5 as an extremely narrow band filter that filters the noise in the feedback loop. The noise power spectral density at the output  $S_v$ , is thereby proportional to the white noise density  $S_n$  in the loop and inversely proportional to  $Q^2$  of the resonating structure according to:

$$S_v = \frac{S_n}{v^2 Q^2} [V^2/Hz] \quad \text{EQUATION 2}$$

where  $v = f/f_0 - f_0/f$ .

One technique for increasing the stability of an oscillator is to increase the effective Q-value by concatenating a plurality of passive, phase rotating networks. However, in practical use, the resonators used in the passive, phase rotating network 20 are either two-port or three-port devices which are generally not unilateral. Cascading these networks results in electrical interactions, and therefore does not result in an increase in the effective Q-value of the cascaded circuit. Resonators cannot simply be concatenated electrically in practical use due to the characteristics of the network. Therefore, it is desired to provide a means to cascade frequency selective circuits of an oscillator which prevents interaction and loading between the resonators.

### SUMMARY

An object of the present invention is to provide an apparatus and method for increasing the Q-value of the oscillator by cascading a plurality of units, which each include a passive frequency selective circuit and an active amplifier to obtain an oscillator exhibiting a net increase for stability.

Another object of the present invention is to realize a net gain in the stability of an oscillator having a passive resonator and an active amplifier, which form an oscillating loop, by increasing the Q-value of the oscillator and thereby realizing a net gain in stability.

These objects of the present invention are fulfilled by providing an oscillator comprising a plurality of passive frequency selective circuits and a plurality of active amplifiers fed back through said passive frequency selective circuits by cascading a plurality of units which each include a pair of one of said passive frequency selective circuits and one of said active amplifiers to form an oscillating loop. By cascading the entire passive frequency selective circuit/active amplifier units, a net gain in the stability of the oscillator is obtained because the noise produced in the units is uncorrelated but the total Q-value is increased. In cascading these units, the active amplifier acts as a buffer

to prevent interaction between the cascaded resonators and a net increase in the stability of the oscillator is obtained.

The objects of the present invention are also fulfilled by providing a method for increasing the stability of an oscillator comprising the steps of

5 cascading a plurality of units, which each include a pair of a passive frequency selective circuit and an active amplifier, and feeding back said active amplifiers through said passive frequency selective circuits in an oscillating loop formed by said plurality of cascaded units. This method also increases the effective Q-value of the oscillator by cascading the plurality of units so that the active amplifiers

10 act as a buffer to prevent interaction between the cascaded resonators.

Further scope of applicability of the present invention will become apparent from the detailed description given hereinafter. However, it should be understood that the detailed description and specific examples, all indicating preferred embodiments of the invention, are given by way of illustration only,

15 since various changes and modifications within the spirit and scope of the invention will become apparent to those skilled in the art from this detailed description.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

The present invention will become more fully understood from the

20 detailed description given hereinbelow and the accompanying drawings which are given by way of illustration only, and thus are not limitative of the present invention wherein:

Figure 1 illustrates a simplified model of a general oscillator;

Figure 2(a) illustrates a signal model of a multi-resonator oscillator

25 according to prior art;

Figure 2(b) illustrates a signal model of a multi-resonator oscillator with cascaded amplification stages;

Figures 2(c) illustrates a signal model of a multi-resonator oscillator using distributed amplifiers according to an embodiment of the present invention;

Figure 3(a) illustrates a model of a single parallel resonance oscillator;

Figure 3(b) illustrates a model of a multiple parallel resonance oscillator according to an embodiment of the present invention;

Figure 4 illustrates a Colpitt-type of a dual resonator oscillator;

5 Figure 5(a) illustrates a balanced oscillator having a parallel LC resonator;

Figure 5(b) illustrates an equivalent circuit of the balanced oscillator of Figure 5(a);

Figure 5(c) illustrates an equivalent circuit of the balanced oscillator of  
10 Figure 5(b) visualizing the dual resonator characteristics; and

Figure 6 illustrates a quadruple resonator having parallel LC resonators.

### **DETAILED DESCRIPTION**

Figure 2(a) illustrates an example of a multi-resonator oscillator according to the prior art. In Figure 2(a), an amplifier 10 is connected to a plurality of  
15 passive phase rotating networks  $20_1, 20_2, \dots, 20_n$  which are concatenated. If two phase rotating networks 20 are concatenated (wherein  $n=2$ ), the total Q-value (or the phase derivative or the group delay) is increased by a factor of 2 provided the phase rotating networks  $20_1, 20_2, \dots, 20_n$  do not interact or load each other. Although the total noise power density  $S_n$  in the loop, which is assumed to be  
20 produced by the (uncorrelated) real parts of the phase rotating networks 20, is also increased by a factor of 2, a net reduction by a factor of 2 in the spectral power density  $S_v$  at the output is realized as shown by Equation 2. The relationship provided by Equation 2 can be generalized to the N resonators cascaded as illustrated in Figure 2(a). The same theory applies as in Equation 2  
25 such that both the noise power density  $S_n$  and the loop quality Q increase by a factor N and the spectral power density at the output is:

$$S_v = \frac{1}{N} \frac{S_n}{v^2 Q^2} [V^2/Hz]$$

EQUATION 3

As shown by the relationship in Equation 3, as more resonators are cascaded (as N increases), the carrier to noise ratio at the oscillator output is improved.

In Figure 2(a), the phase rotating networks 20 are assumed to be unilateral four port networks. However, in practice, the phase rotating networks 20 are either two port devices with one port grounded, or three port devices that are not unilateral. For two port devices, concatenating the devices results in a parallel connection which will neither increase the Q-value nor improve the noise performance. For three port devices, the phase rotating networks cannot be considered as independent and therefore the phase rotating networks 20 load each other which does not provide the increase of the Q-value according to Equation 3. In Figure 1, the loss L (in dB) in the passive resonator is compensated by the gain A (in dB) in the amplifier. In Figure 2(a), each passive resonator has a loss L, resulting in a total loss of  $N \times L$  (in dB) for the N cascaded passive resonators. The total loss must be compensated by the amplifier which therefore has to increase its amplification to  $N \times A$  (in dB). In Figure 2(b), the increased amplification has been achieved by cascading N amplifiers each with amplification A. In the embodiment of the present invention, the amplification is distributed over the loop in such a way that each resonator is followed by an amplification stage with amplification A as illustrated in Figure 2(c). Each resonator/amplifier unit can be considered as a unit. A plurality of these units can be cascaded without any problem, because the amplifier is a unilateral device which buffers the resonator and prevents loading and electrical interactions between the resonators.

When considering the oscillator as a loop with amplification stages and phase rotating networks, the oscillator resonates at a frequency for which the total phase rotation in the loop is a multiple of  $360^\circ$ . Each of the phase rotating networks 20 preferably has a rapid phase change around the resonance frequency so that the noise in the loop is less effective in varying the output frequency (phase jitter). The steepness of the phase change around the resonance frequency



is proportional to the quality or the Q-value of the phase rotating networks 20. The overall Q-value of the oscillator can be increased by cascading multiple phase rotating networks. Even though the noise in the feedback loop increases due to the noise of the added phase rotating networks, a net increase in the  
5 oscillator stability is realized. The output spectral density of the oscillator is proportional to the total noise power in the feedback loop and inversely proportional to  $Q^2$ . The noise power increases linearly with the number of phase rotating networks because the noise sources in the phase rotating networks can be assumed uncorrelated. The effective Q-value also increases proportionally to the  
10 number of phase rotating networks and the resulting spectral power density at the output of the oscillator decreases inversely proportional to the number of phase rotating networks applied.

Figure 3(a) illustrates an example of a known configuration for a single parallel resonance oscillator. Figure 3(a) illustrates a single parallel resonance  
15 oscillator 100 which includes a current source 50, a resistor 60, an inductor 70, a capacitor 80, and a transconductance amplifier 90. The current source 50 represents the noise generated in the resonator and in the transconductance amplifier 90 as an equivalent noise source  $I_n$  in parallel to the resonator. A factor  $\gamma$  is a proportionality constant giving the relationship between the current  
20 of the voltage-controlled current source and a control voltage  $V$ . Therefore,  $\gamma$  is the transconductance of the transconductance amplifier 90 represented by the voltage-controlled current source. To obtain the multi-resonator oscillator as described in this invention, the feedback loop for the parallel resonance oscillator 100 is opened at the transconductance output so that the network 100 may be  
25 cascaded in order to form a multiple parallel resonance oscillator as illustrated in Figure 3(b). Figure 3(b) illustrates a plurality of the parallel resonance oscillator networks  $100_1, 100_2, \dots, 100_n$  cascaded by connecting the output from one phase rotating network to the input of the next phase rotating network and connecting the output of the last transconductance amplifier  $90_n$  to feed back to the first

network 100<sub>1</sub>. By assuming that the equivalent noise current sources are uncorrelated, the multiple resonance oscillator having N stages will exhibit a  $10\log N$  dB lower spectral power density than the single resonance oscillator as illustrated in Figure 3(a).

5           There are many types of resonator/amplifier configurations possible and Figure 4 illustrates yet another embodiment of a dual resonator oscillator having a Colpitt-like structure. Figure 4 illustrates two resonator/amplifier configurations 200<sub>1</sub> and 200<sub>2</sub> which each include first capacitors 210<sub>1</sub> and 210<sub>2</sub>, inductors 220<sub>1</sub> and 220<sub>2</sub>, second capacitors 230<sub>1</sub> and 230<sub>2</sub>, and transistors 240<sub>1</sub> and 240<sub>2</sub>. The transistors 240<sub>1</sub> and 240<sub>2</sub> represent transconductances. The output  
10           of the first stage is connected to the input of the second stage and the output of the second stage is fed back to the input of the first stage. When forming the feedback loop, the total phase rotation must be maintained at a multiple of 360°. Therefore, this dual resonator oscillator can be expanded to a multiple resonator  
15           oscillator by maintaining the feedback loop at a multiple of 360°. For example, if the resonator/amplifier units produce a phase rotation of 180°, an even number of the resonator/amplifier units must be used to close the feedback loop, and if the phase rotation of the resonator/amplifier units is 360°, either an odd or even number of resonator/amplifier units may be used.

20           Figure 5(a) illustrates a known balanced oscillator using a parallel LC resonance. This known parallel LC resonator includes two transistors 320 and 330 connected in a balanced configuration to a capacitor 310 and an inductor 300. However, this known parallel LC resonator can also be considered as a dual resonator oscillator as illustrated in Figure 5(b) for another embodiment of  
25           the present invention. In Figure 5(b), the capacitor 300 and the inductor 310 illustrated in Figure 5(a) are split into two parts in series to form inductors 302 and 304 and capacitors 312 and 314 which are grounded at the intersection points. This shows that the balanced oscillator is actually a dual resonator oscillator, because Figure 5(b) is equivalent to Figure 5(c) which clearly

visualizes the dual resonator nature according to an embodiment of the present invention.

The construction of the dual resonator oscillator as shown in Figures 5(a), 5(b), and 5(c) can be extended with yet another balanced configuration which results in a quadruple resonator oscillator as shown in Figure 6. With the same techniques as visualized in Figures 5(a), 5(b), and 5(c), the quadruple resonator oscillator of Figure 6 can be visualized as a cascade of four parallel resonator/amplifier units. The quadruple resonator oscillator includes two parallel resonances formed by an inductor 400 and capacitor 410 and by an inductor 490 and capacitor 480. Four transistors 420, 430, 460, and 470 are disposed in a common-emitter configuration and are connected in series to form a loop. This quadruple resonator oscillator configuration has a 6 dB noise improvement over the single resonator oscillator illustrated in Figure 3(a).

This technique of cascading phase rotating networks and resonator/amplifier units can also be applied to voltage and current controlled oscillators (VCOs). For these VCOs, one or more resonators will have a controllable component such as a varactor in parallel to the resonance capacitor (not shown).

With multiple resonators in a circuit, mutual inductance coupling may exist between the inductors of the different resonators. It is known that coupling will change the effective inductance of the inductors but will not effect the noise performance provided the noise is only created in the resonators. If there is a considerable noise contribution from the amplifier as well, the Q-value of the feedback loop should be as large as possible by making a large capacitance value for parallel resonance or a large inductor value for series resonance. For parallel resonance, positive coupling, which increases the effective inductance, is undesired. For series resonance, coupling will increase the performance but mutual coupling always gives an offset in the resonance frequency which can be

compensated for with the capacitor. Therefore, the capacitance and inductance values are chosen based on these considerations.

5 The embodiments of the present invention are directed to cascading units which include a passive frequency selective circuit and an active amplifier being a unidirectional or unilateral device which acts as a buffer. As a result, interaction and loading is prevented between the passive frequency selective circuits and the effective Q-value is increased so that a net gain in the stability of the oscillator is realized.

10 The invention being thus described, it would be obvious that the same may be varied in many ways. Such variations are not to be regarded as a departure from the spirit and scope of the invention, and all such modifications as would be obvious to one skilled in the art are intended to be included within the scope of the following claims.

## CLAIMS:

1. A device for increasing the stability of an oscillator comprising:  
a plurality of units cascaded in a loop, each of said cascaded units  
including,  
5                   a passive frequency-selective circuit, and  
                  an active amplifier;  
said plurality of units being cascaded to form said loop for feeding  
back said active amplifiers through said passive frequency-selective  
circuits.
- 10           2. A device according to Claim 1, wherein each of said passive  
frequency-selective circuits comprises a resonator.
3. A device according to Claim 1, wherein each of said active amplifiers  
is a unilateral or unidirectional device which acts as a buffer to prevent  
interaction between said passive frequency-selective circuits.
- 15           4. A device according to Claim 1, wherein each of said frequency-  
selective circuits is a unilateral four-port device.
5. A device according to Claim 1, wherein the oscillator is a voltage or  
current controlled oscillator.
6. An oscillator according to Claim 2, wherein at least one of said  
20   resonators comprise a controller component.
7. An oscillator according to Claim 2, wherein at least one of said  
resonators comprise a varactor in parallel to a resonance capacitor.

8. A method for increasing the stability of an oscillator comprising the steps of:

5 forming an oscillating loop from a plurality of cascaded units including a plurality of passive frequency-selective circuits and a plurality of active amplifiers; and feeding back said active amplifiers through said passive frequency-selective circuits by said plurality of cascaded units of said oscillating loop.

10 9. A method according to Claim 8, wherein said passive frequency-selective circuits comprise resonators.

10. A method according to Claim 8, wherein said active amplifiers are unilateral or unidirectional devices which act as buffers to prevent interaction between said passive frequency-selective circuits.

15 11. A method according to Claim 8, wherein said frequency-selective circuits are unilateral four-port devices.

12. A method according to Claim 8, wherein the oscillator is a voltage or current controlled oscillator.

13. A method according to Claim 9, wherein at least one of said resonators comprise a controller component.

20 14. A method according to Claim 9, wherein at least one of said resonators comprise a varactor in parallel to a resonance capacitor.

## AMENDED CLAIMS

[received by the International Bureau on 01 October 1996 (01.10.96);  
original claims 1-5 and 8 amended; new claims 15 and 16 added;  
other claims unchanged (3 pages)]

1. An oscillator having increased stability comprising:  
a plurality of units cascaded in a loop having an output, an oscillator output signal being provided at the output, each of said cascaded units including,  
a passive frequency-selective circuit tuned to a maximum phase derivative, and  
an active amplifier;  
said plurality of units being cascaded to form said loop for feeding back said oscillator output signal to said active amplifiers through said passive frequency-selective circuits.
2. An oscillator according to Claim 1, wherein each of said passive frequency-selective circuits comprises a resonator.
3. An oscillator according to Claim 1, wherein each of said active amplifiers is a unilateral or unidirectional device which acts as a buffer to prevent interaction between said passive frequency-selective circuits.
4. An oscillator according to Claim 1, wherein each of said frequency-selective circuits is a unilateral four-port device.
5. An oscillator according to Claim 1, wherein the oscillator is a voltage or current controlled oscillator.
6. An oscillator according to Claim 2, wherein at least one of said resonators comprise a controller component.
7. An oscillator according to Claim 2, wherein at least one of said resonators comprises a varactor in parallel to a resonance capacitor.

8. A method for providing an oscillator having increased stability, comprising the steps of:

forming an oscillating loop having an output from a plurality of cascaded units, each of said cascaded units including a passive frequency-selective circuit tuned to a maximum phase derivative and an active amplifier;

providing an oscillator output signal at said output of said oscillating loop; and

feeding back said oscillator output signal to said active amplifiers through said passive frequency-selective circuits by said plurality of cascaded units of said oscillating loop.

9. A method according to Claim 8, wherein said passive frequency-selective circuits comprise resonators.

10. A method according to Claim 8, wherein said active amplifiers are unilateral or unidirectional devices which act as buffers to prevent interaction between said passive frequency-selective circuits.

11. A method according to Claim 8, wherein said frequency-selective circuits are unilateral four-port devices.

12. A method according to Claim 8, wherein the oscillator is a voltage or current controlled oscillator.

13. A method according to Claim 9, wherein at least one of said resonators comprise a controller component.

14. A method according to Claim 9, wherein at least one of said resonators comprises a varactor in parallel to a resonance capacitor.






15

15. An oscillator according to Claim 1, wherein the oscillator generates a total phase rotation of  $360^\circ \times n$ , where  $n$  is an integer or zero.

16. A method according to Claim 8, wherein the oscillator generates a total phase rotation of  $360^\circ \times n$ , where  $n$  is an integer or zero.

1/4

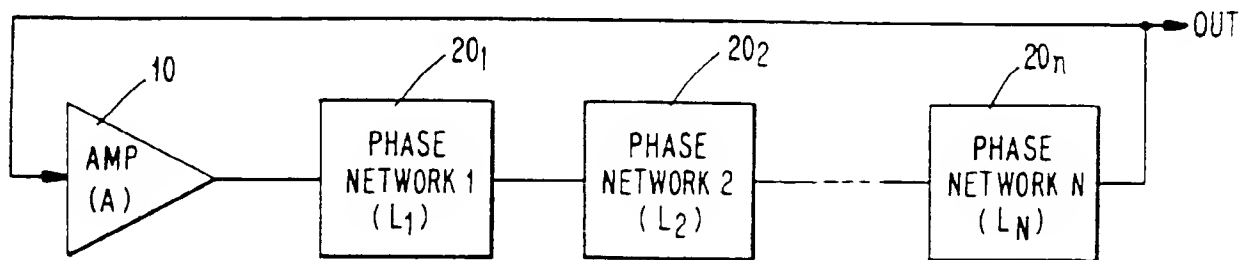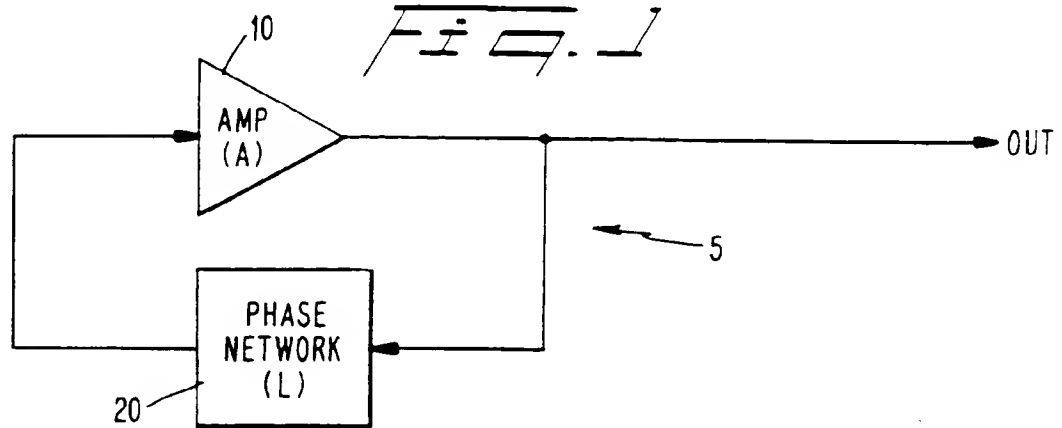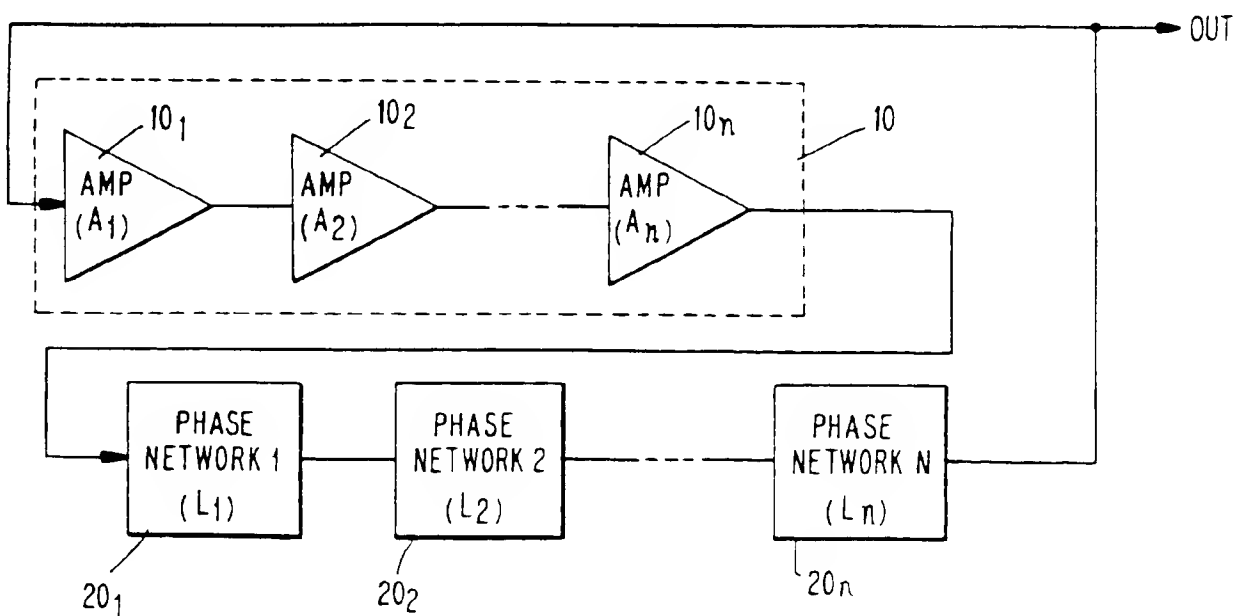*FIG. 2(a)**FIG. 2(b)*

2 / 4

FIG. 2(c)

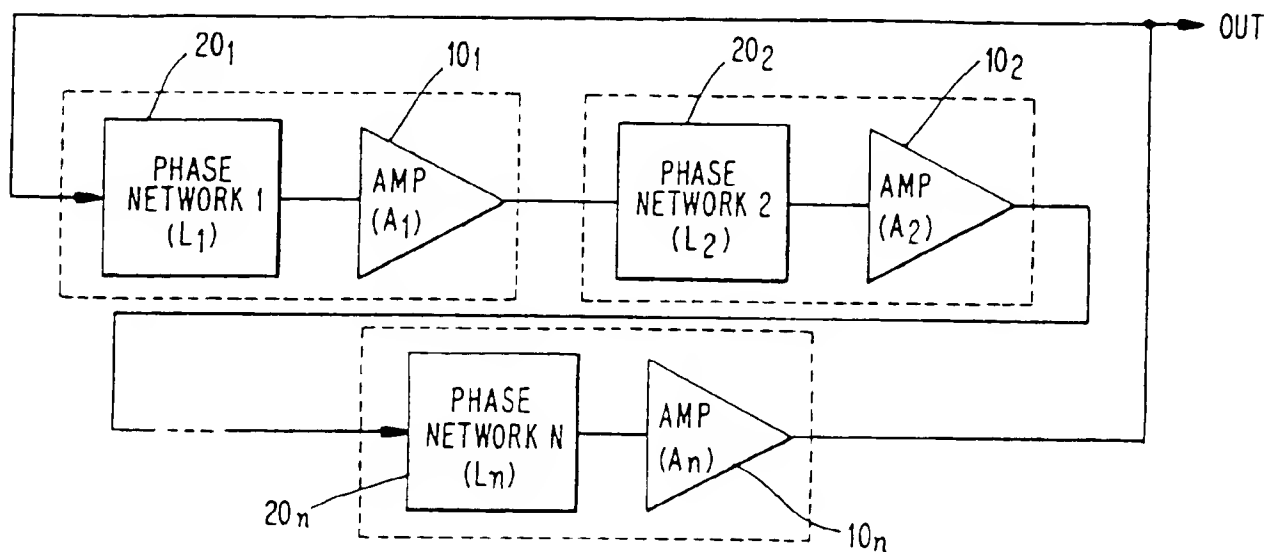


FIG. 3(a)

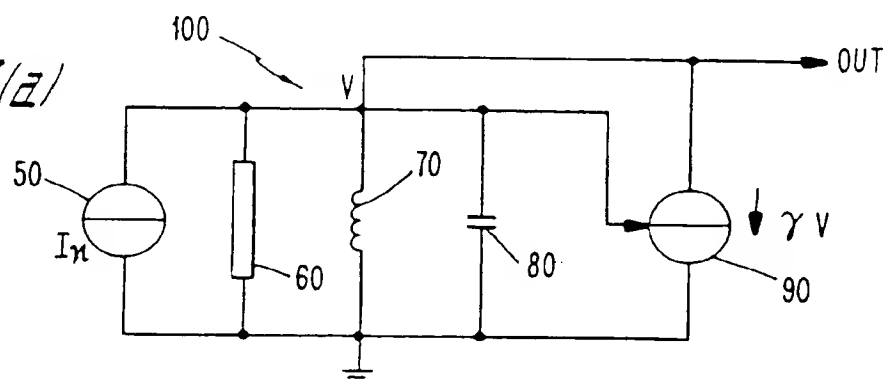


FIG. 3(b)

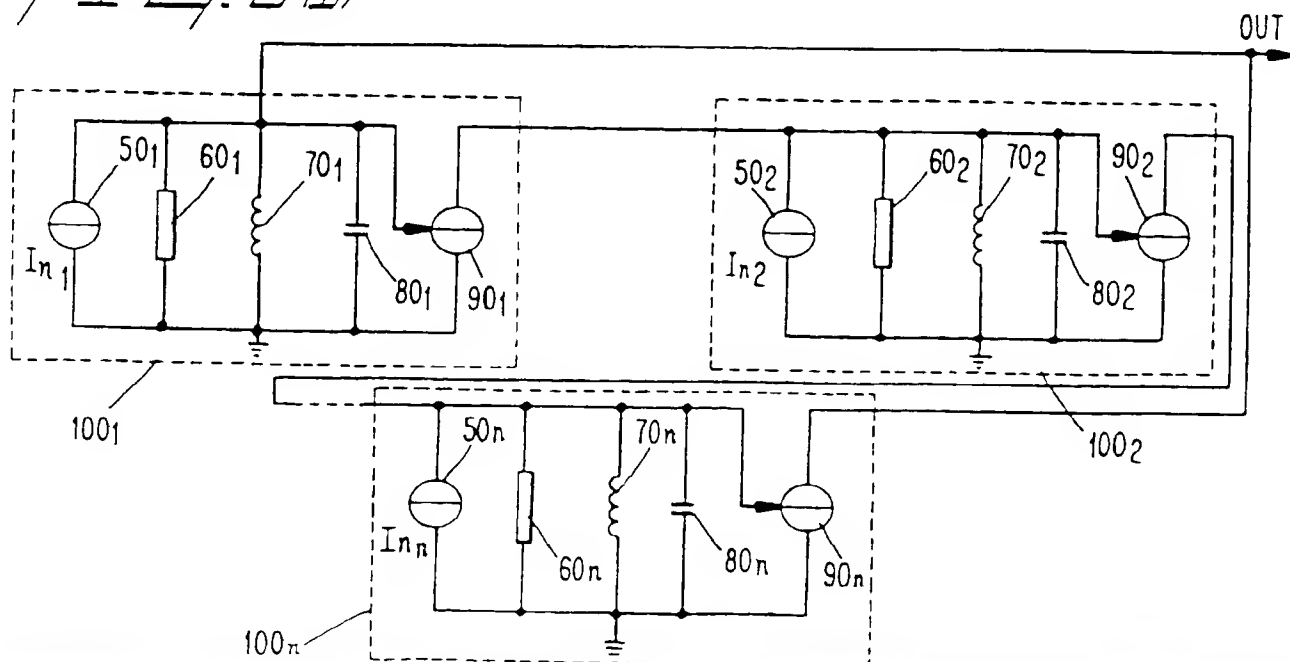


FIG. 4

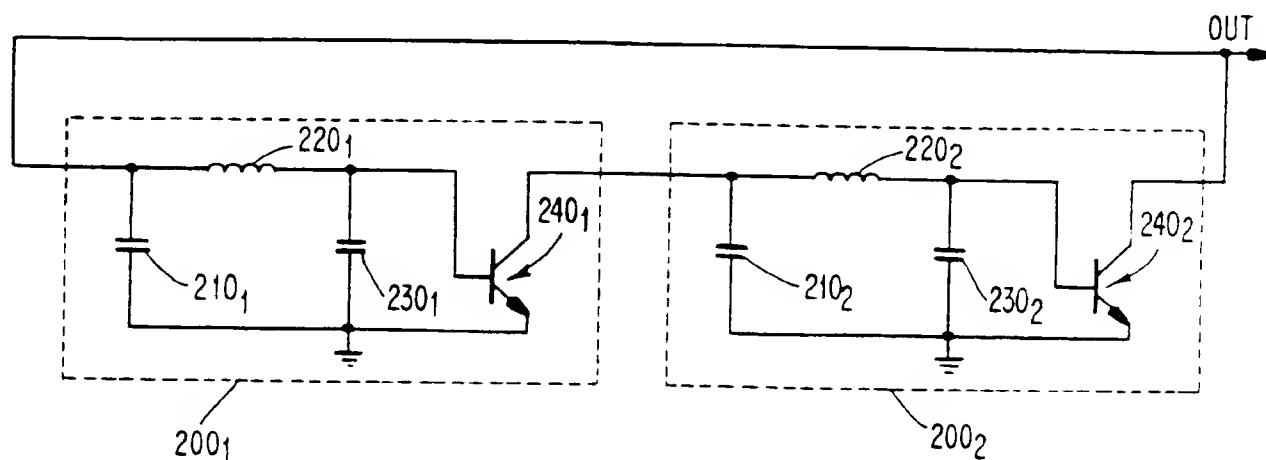


FIG. 5 (a)




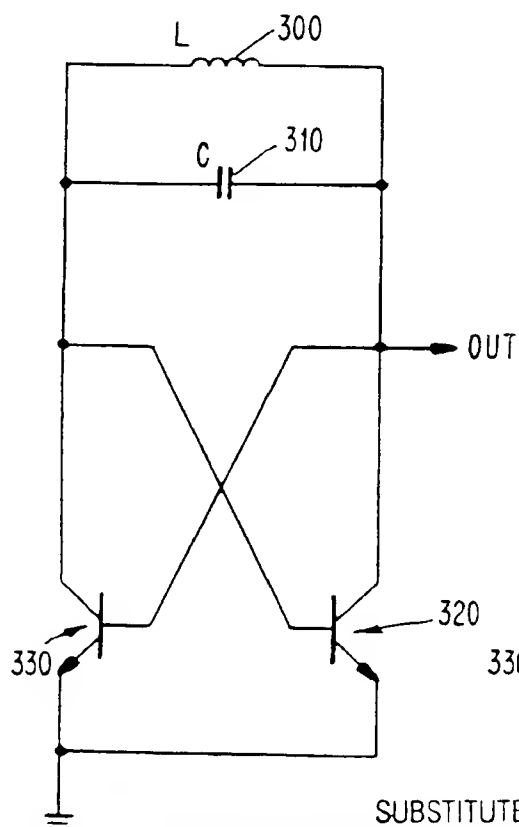


FIG. 5 (b)

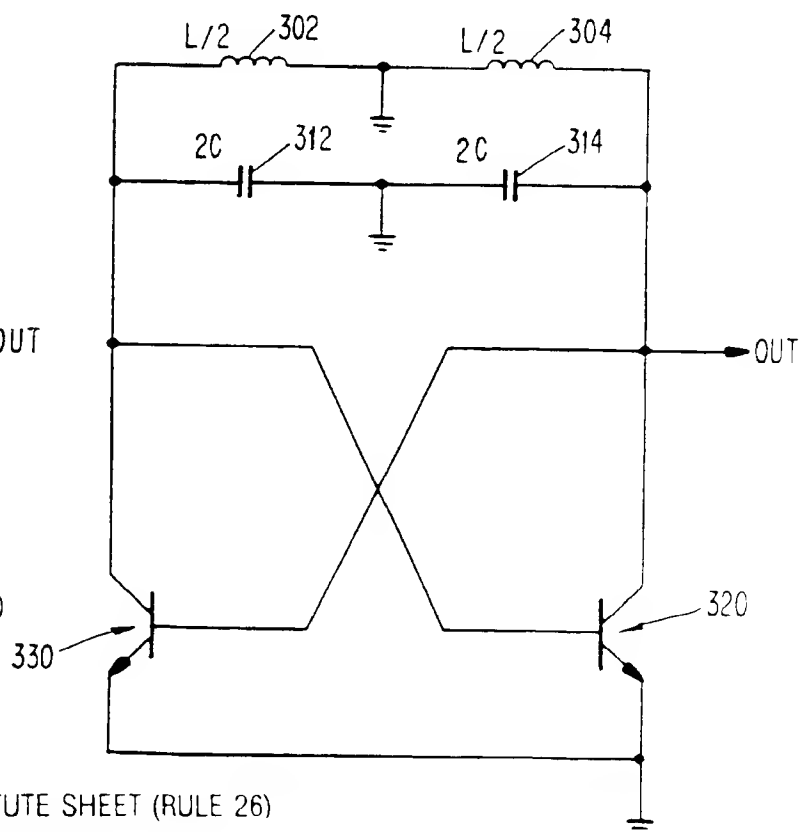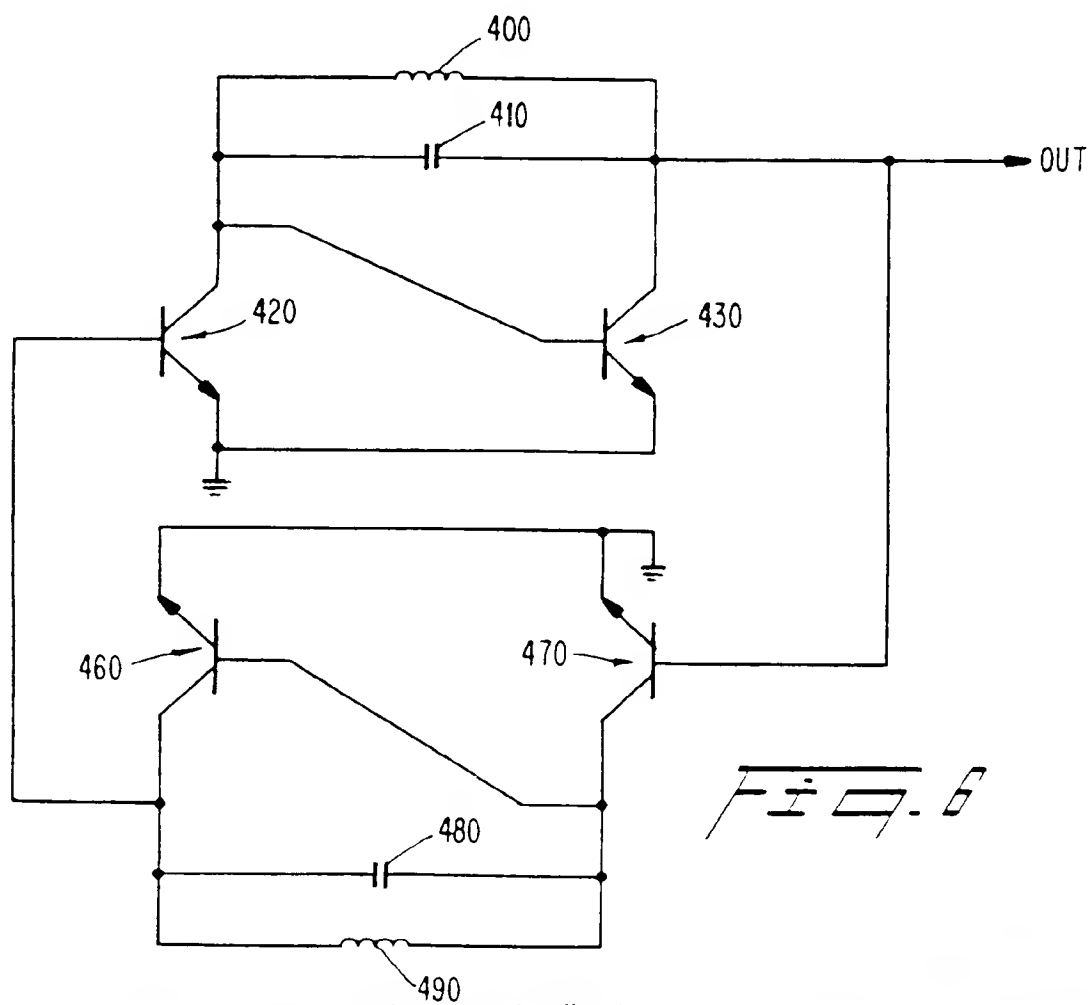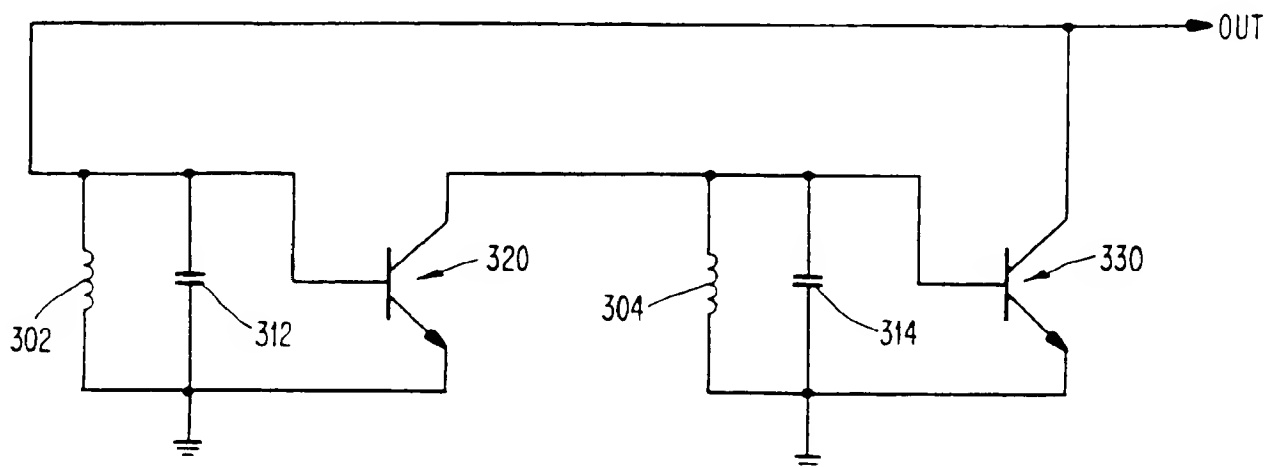

4/4

*Fig. 5(c)**Fig. 6*

# INTERNATIONAL SEARCH REPORT

Int'l. Application No.  
PCT/SE 96/00385

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 H03B5/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 H03B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	IEEE JOURNAL OF SOLID-STATE CIRCUITS, vol. 27, no. 3, March 1992, pages 444-450, XP002009552 NGUYEN AND MEYER:: "A 1.8GHz Monolithic LC Voltage-Controlled Oscillator" see the whole document ---	1-3,5, 8-10,12
X	GB,A,1 029 595 (HOGARTH BOOTH AND MCFARLIN) 18 May 1966 see page 1, line 47 - line 85; figure 1 ---	1,8
X	GB,A,2 220 316 (THE PLESSEY COMPANY PLC) 4 January 1990 see figures 1,3 --- -/--	1,8

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- \*A\* document member of the same patent family

Date of the actual completion of the international search

29 July 1996

Date of mailing of the international search report

25.08.96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl.  
Fax (+ 31-70) 340-3016

Authorized officer

Peeters, M

# INTERNATIONAL SEARCH REPORT

In ternational Application No  
PCT/SE 96/00385

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE,A,43 21 565 (SIAGMBH SICAN ANLAGEN-VERWALTUNGSGESELLSCHAFT) 12 January 1995 see page 4, line 6 - line 20; figure 3 ---	1-4,8-11
A	DE,A,28 31 628 (STANDARD ELEKTRIK LORENZ AG) 31 January 1980 see page 7, line 3 - line 15 -----	7,14

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SE 96/00385

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB-A-1029595		NONE	
GB-A-2220316	04-01-90	NONE	
DE-A-4321565	12-01-95	CA-A- 2143427	12-01-95
		WO-A- 9501671	12-01-95
		EP-A- 0657071	14-06-95
		FI-A- 950904	26-04-95
DE-A-2831628	31-01-80	NONE	